

### Complies with the requirements of

AS3894.1-2002 and Nace Standards: SP0490-2007;  
RP0274-2004 & SP0188-2006


### Applications

- Used for detection of coating porosity (pin-holes, or holidays) in dielectric (insulation type) coatings on conductive substrates, including concrete.
- Regulated 'Pulsed' output fully adjustable  
Ideal for use:
  - In moist conditions
  - On wet coating surfaces
  - On contaminated coating surfaces
  - On carbon-impregnated coatings, ie: carbonated rubber
  - On 'plastic'/fibreglass type coatings likely to become electrostatically charged
  - Coating Thickness Range: to 25mm using P40 model



### Controls

- 1 LED display
- 2 On/Battery condition indicator Light
- 3 Visual alarm indicates when fault is found
- 4 Voltage Up
- 5 Voltage Down
- 6 Off
- 7 On
- 8 Audible alarm when fault is found
- 9 Earphone (connected on opposite side)
- 10 Fuse (2.5A slow blow) 5 x 20mm
- 11 Earth connection point
- 12 Alarm sensitivity 'wet' or 'dry' conditions (located in battery compartment)
- 13 Charge connector
- 14 Clip-on power pack

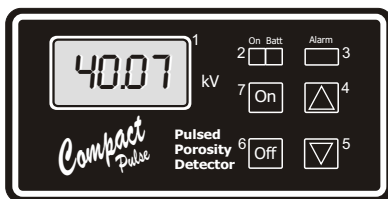

CONTROL LAYOUT



SIDE VIEW

### Features

- Lightweight with ABS case
- LED display of voltage
- Fully adjustable voltage
- Clip-on battery pack
- Constant test current
- Overcharge protection
- Earphones for noisy environments

### Complete with

#### Industrial Kit:

Detector with clip-on power pack, 10hr Charger, Probe Handle with 2m lead, 60mm Connector for flat brushes, 7m Earth lead with clamp, Fan Brush, 250mm Flat brass wire brush, 450mm Probe extension, Air-operated earphones, Shoulder & Waist Harness, Kit Case, Operating instructions with calibration certificate.

### Specifications

	P20	P40
Unit weight:	2.2kg	2.2kg
Packed weight:	8.0kg	8.0kg
Display:	LED	LED
Voltage:	1 to 20kv	5 to 40kv
Resolution:	100v	100v
Alarm range:	2 to 20kv	5 to 40kv
Short circuit test current:	1.5mA max	
Power supply:	Gel Cell 3Ah Clip On	
Dimensions:	260 x 160 x 70mm	
Alarm:	Audible	
Probe handle:	Rubber lead	
Battery condition:	LED Indicator	

Made in **AUSTRALIA**

### PCWI International Pty Ltd

13 Alhambra Avenue CARDIFF NSW 2285  
Ph: (02) 4954 3900 • Fax: (02) 4954 3999  
email: sales@pcwi.com.au • <http://www.pcwi.com.au>

### Complies with the requirements


AS3894.1-2002 and Nace Standards: SP0490-2007;  
RP0274-2004 & SP0188-2006

### Applications


- Used for detection of coating porosity (pin-holes, or holidays) in dielectric (insulation type) coatings on conductive substrates, including concrete.
- Regulated 'Pulsed' output fully adjustable  
Ideal for use:
  - On contaminated coating surfaces
  - On carbon-impregnated coatings, ie: carbonated rubber
  - On 'plastic'/fibreglass type coatings likely to become electrostatically charged
  - On very thick coatings

### Controls

- 1 LED display
- 2 On/Battery condition indicator Light
- 3 Visual alarm indicates when fault is found
- 4 Voltage Up
- 5 Voltage Down
- 6 Off
- 7 On
- 8 Audible alarm when fault is found
- 9 Earphone (connected on opposite side)
- 10 Fuse (4A slow blow) 5 x 20mm
- 11 Earth connection point
- 12 Charge connector
- 13 Clip-on power pack

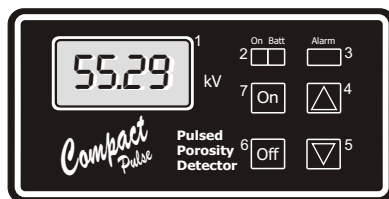

CONTROL LAYOUT

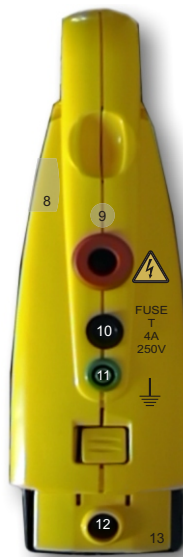

SIDE VIEW



### Features

- Lightweight with ABS case
- LED display of voltage
- Fully adjustable voltage
- Clip-on power pack
- Constant test current
- Overcharge protection
- Earphones for noisy environments

### Complete with

#### Industrial Kit:

Detector with clip-on power pack, 10hr Charger, Probe Handle with 2m lead, 60mm Connector for flat brushes, 7m Earth lead with clamp, Fan Brush, 250mm Flat brass wire brush, 450mm Probe extension, Air-operated earphones, Shoulder & Waist Harness, Kit Case, Operating instructions and Calibration Certificate.

### Specifications

Unit weight:	2.2kg
Packed weight:	8.0kg
Display:	LED
Voltage:	10 to 60kV
Resolution:	100v
Alarm range:	10 to 60kV
Short circuit test current:	500µa max
Power supply:	Gel Cell 3Ah Clip On
Dimensions:	260 x 160 x 70mm
Alarm:	Audible
Probe handle:	Rubber lead
Battery condition:	LED Indicator

Made in **AUSTRALIA**

### PCWI International Pty Ltd

13 Alhambra Avenue CARDIFF NSW 2285  
Ph: (02) 4954 3900 • Fax: (02) 4954 3999  
email: sales@pcwi.com.au • <http://www.pcwi.com.au>